



PACKAGING MACHINERY

提供食品、医药及化妆品等行业包装生产线解决方案



顧德包裝
GOOD PACKAGING

智能化包裝-新顧德 **智**造

上海新顾德机械制造有限公司成立于2002年，前身为上海顾德包装机械设备有限公司，是国家行业标准第一起草人，也是装盒机国家标准的主要起草单位。公司自成立起来陆续为国内外1000多家各类型企业提供了2000多台(套)专业设备，一直以来公司都在不断创新，研发各类型的后道包装设备，目前除在药品包装行业外，已在乳品及保健品行业独树一帜。

公司产品在技术上不断改进，在工艺上先后对凸轮、齿轮、传动部件进行优化；改进和提高了材质的要求，对零件的检验做到可追溯性，从而保证产品的质量和产品的稳定性。通过自身的研发和机械设计理念的提升，在2015年获得上海市认定为优秀“专利成果转化项目”。

公司坐落在上海金山区，本部工厂占地约10000余平方米，另有独立研发中心，现公司拥有机械制造和检测设备近30套，负责研发的专业工程师团队12名，有较强的独立科技开发能力，具备年产200台(套)的后道包装生产设备能力，已通过国家专业检测中心专业认证。

顾德市场销售网络已发展到全国各省份，2002年到现在一路走来得到了国药集团工业、广州医药集团、广药白云山、石药集团、常州四药、上海信谊药业、双鹤药业、广西金嗓子、福建广生堂制药、中新药业、龙科马、哈药集团、康思贝集团、齐鲁制药、江苏济川、云南白药、陕西步长、山西振东药业、扬子江药业集团等制药厂家和北京大宝、海昌隐形眼镜、尼维雅、上海家化集团、贝亲母婴、章光101等日用品生产企业及浙江贝因美和香港明一、雅士利奶粉、西安百跃乳业、西安金牛乳业、广州仙乐、呼伦贝尔双娃乳业等企业的一致认可。



www.new-good.com





COMPANY PROFILE

上海新顾德机械制造有限公司
SHANGHAI XINGUDE MACHINERY MANUFACTURING CO., LTD

Shanghai New Goode Machinery Manufacturing Co., Ltd, was founded in 2002, formerly known as Shanghai Goode packaging machinery equipment Co., Ltd. It is the first drafter of the national industry standard and the main drafting unit of the national standard for cartoning machine. Since its establishment, the company has successively provided more than 2000 sets of professional equipment, cartoning machines and machine palletizing for nearly 1000 enterprises of various types at home and abroad. The company continues to innovate and develop various types of cartoning machine equipment, currently in addition to the pharmaceutical packaging industry and health products packaging industry.

The company's products continue to improve in technology, successively optimize the cam, gear and transmission parts; improve and improve the material requirements, and make the inspection of parts traceable, so as to ensure the quality and stability of products. Through its own R & D and mechanical design concept improvement, it was awarded the "patent achievement transformation project" in 2015 by Shanghai.

The company is located in Fengxian District, Shanghai. The factory covers an area of more than 10000 square meters. There is a third research and development center. Now the company has nearly 30 sets of machinery manufacturing and testing equipment, 12

professional engineers in charge of research and development, strong independent scientific and technological development ability, and production capacity of more than 200 cartoning machines per year. It has passed the professional certification of national professional testing center.

Goode's market sales network has developed to all provinces in China. From 2002 to now, it has obtained Sinopharm group industry, Guangzhou Pharmaceutical Group, Baiyunshan Pharmaceutical Group, Shiyao group, Changzhou No.4 Pharmaceutical Co., Ltd., Shanghai Xinyi Pharmaceutical Co., Ltd., Shuanghe Pharmaceutical Co., Ltd., Guangxi jinshaozi Pharmaceutical Co., Ltd., Fujian guangshengtang Pharmaceutical Co., Ltd., Zhongxin Pharmaceutical Co., Ltd., longkema Pharmaceutical Co., Ltd., kangsibei group, Qilu Pharmaceutical Co., Ltd., Jiangsu Jichuan Pharmaceutical Co., Ltd Yunnan Baiyao, Shaanxi Buchang, Shanxi Zhendong pharmaceutical, Yangzijiang Pharmaceutical Group and other pharmaceutical manufacturers, as well as Beijing Dabao, Haichang contact lens, Nivea, Shanghai Jiahua group, Fritillaria, Zhangguang 101 and other daily necessities manufacturers, Zhejiang bainmei and Hong Kong Mingyi, Yashili milk powder, Xi'an Baiyue dairy, Xi'an Jinniu dairy, Guangzhou xianle, Hulunbeier Shuangwa dairy, etc Industry consensus.

道路是曲折艰辛的，信心是持久无畏的，凭借独特魅力，赢得无数赞誉。新顾德所获得的种种殊荣，也是新顾德留在奋斗征程上的一个璀璨的内光点，既是动力，也是压力，不负众望，勇往直前，积极开创新天地！

The road is tortuous and arduous, confidence is enduring and fearless, with unique charm, it has won numerous praise. The new honors gained from the new Gu de are also a bright interior point of the new struggle, which is the driving force, the pressure, deliver the goods to the masses and advance the new world with vigor.





HONOR

荣誉



车间 WORKSHOP

先进技术
Advanced
technique

精益求精
Refine on

www.new-good.com

先进的工艺，一流的装备，计算机辅助设计系统、专业化制造分工，这些形成了一个最完善的设计制造流程。新顾德对与质量相关的控制点进行全程监控，每道工序、每个环节都精益求精，严格把关。先进的检测设备、规范的质量保证体系确保品质与百无一失。



Advanced technology, first-class equipment, computer-aided design system and specialized manufacturing division of labor form the most perfect design and manufacturing process. Xingude monitors the quality related control points in the whole process, and keeps improving every process and every link. Advanced testing equipment, standardized quality assurance system to ensure the quality and international synchronization.



目录

CATALOG

www.new-good.com

智能化包装-新顾德智造
Intelligent packaging
New Gude Zhizao

提供食品、医药及化妆品等行业包装生产线解决方案

Provide packaging line solutions for food,
medicine and cosmetics industries



GDZ-500A/B
自动装盒机
Automatic Cartoner

01



GDZ-330
自动装盒机
Automatic Cartoner

03



GDZ-230
装盒机
Cartoner

05



条包生产线
Strip and parcel
production line

07



SDZ-400
型三维包装机
3D packaging machine

17



GDZ-130B
自动装盒机
Automatic Cartoner

09



FC-160/200/260
型重量检测机
type weight test machine

19



韩国YOUNG TECH
液体/粉剂类多列机
Liquid / powder multi line machine

11



KDZ-350/400
型自动捆包机
automatic machine

21



GDZ-180
连续式自动装盒机
Successive Automatic
Boxing Machines

13



FDZ-600
型装箱一体机
automatic machine

23



GDZ-130
间隙式装盒机
ordinary intermittent
cartoning machine

15



机器人装箱、码垛系统
automatic machine

25

GDZ-500A/B

自动装盒机

Automatic Cartoner



上海新源德机械制造有限公司
电话: 021-57320013



GDZ-500型自动装盒机是最新型的高速装盒机，适用于各类产品高速装盒要求。

- 结构先进，维护简便。
- 后推式推料。
- 无主轴传动。
- 全伺服驱动、一键调节功能。
- 高配电气。
- 纸盒料仓及压盒杆自动升降。
- 配备视觉系统检测产品完整性。
- 伺服控制进料系统。
- 选配GUK高速折纸机。
- 配备活动护板，防物料掉落。
- 稳定生产速度350-450盒/分钟。

GDZ-500 Automatic cartoner is the latest high-speed cartoner, which is suitable for all kinds of products.

- Advanced structure and easy maintenance.
- Backward pushing.
- No spindle drive.
- Reserve full servo drive and one key adjustment function.
- High power distribution.
- Automatic lifting of carton bin and pressure bar.
- Equipped with visual system to detect product integrity.
- Servo control feeding system.
- The Guk high-speed origami machine is selected.
- Movable guard board is equipped as standard to prevent materials from falling.
- Stable production speed of 350-450 boxes / min.

技术参数 Technical Parameter

名称	Name	单位Company	数值或说明Value or description
装盒机总功率	Total power of Cartoner	kw	6
工作电压	working voltage	v	380
装盒速度	Packing speed	盒/min	350-450
纸盒纸质	Carton paper	g/m ²	300-350
纸盒尺寸	Carton size	mm	(70-180) × (45-90) × (18-60)
说明书规格	Specifications	长*宽	(70-320) × (70-210)
说明书纸质	Manual paper	g/m ²	50-60
耗气量	Air consumption	L/min	5-8
压缩空气	compressed air	Mpa	0.4-0.6
总重量	Total weight	kg	6000
外形尺寸	Dimensions	mm	5800 × 2100 × 2200
噪声	Noise	dB	≤75

GDZ-330

自动装盒机

Automatic Cartoner



上海新顺德机械制造有限公司
电话: 021-57320018



GDZ-330型自动装盒机是经典的中高速装盒机，适用于各类产品中高速装盒要求。

- 结构先进，维护简便。
- 无主轴传动，噪音低。
- 纸盒料仓及压盒杆自动升降。
- 配备视觉系统检测产品完整性。
- 伺服控制进料系统。
- 高性能折纸机，防双张设计。
- 选配GUK高速折纸机。
- 选配活动护板，防物料掉落。
- 稳定生产速度240-300盒/分钟。

GDZ-330 Automatic cartoning machine is a classic medium and high-speed cartoner, which is suitable for all kinds of products.

- Advanced structure and easy maintenance.
- No spindle drive, low noise.
- Automatic lifting of carton bin and pressing bar.
- Equipped with visual system to detect product integrity.
- Servo control feed system.
- High performance origami, double sheet design.
- Guk high speed origami machine is selected.
- Optional movable guard board to prevent material falling.
- Stable production speed 240-300 boxes / min.

技术参数 Technical Parameter

名称	Name	单位Company	数值或说明Value or description
装盒机总功率	Total power of Cartoner	kw	5
工作电压	working voltage	v	380
装盒速度	Packing speed	盒/min	240-300
纸盒纸质	Carton paper	g/m ²	300-350
纸盒尺寸	Carton size	mm	(70-180) × (45-90) × (18-60)
说明书规格	Specifications	长*宽	(70-320) × (70-210)
说明书纸质	Manual paper	g/m ²	50-60
耗气量	Air consumption	L/min	5-8
压缩空气	compressed air	Mpa	0.4-0.6
总重量	Total weight	kg	5000
外形尺寸	Dimensions	mm	4300 × 1600 × 2000
噪声	Noise	dB	≤75

GDZ-230

装箱机 Cartoner



上海新源德机械制造有限公司
电话: 021-57320013



GDZ-230型自动装盒机是经典的中高速装盒机，适用于各
类产品中高速装盒要求。

- ◎结构先进，维护简便。
- ◎无主轴传动，噪音低。
- ◎纸盒料仓及压盒杆自动升降。
- ◎配备视觉系统检测产品完整性。
- ◎伺服控制进料系统。
- ◎高性能折纸机，防双张设计。
- ◎选配活动护板，防物料掉落。
- ◎稳定生产速度160-200盒/分钟。

GDZ-230 Automatic cartoning machine is a classic
medium and high-speed cartoning machine, which is

- ◎suitable for all kinds of products.
- ◎Advanced structure and easy maintenance.
- ◎No spindle drive, low noise.
- ◎Automatic lifting of carton bin and pressure bar.
- ◎Equipped with visual system to detect product integrity.
- ◎Servo control feeding system.
- ◎High performance origami, double sheet proof design.
- ◎Choose movable guard board to prevent material falling.
- ◎Stable production speed of 160-200 boxes / min.

技术参数 Technical Parameter

名称	Name	单位Unit	数值或说明Value or description
装盒机总功率	Total power of Cartoner	kw	4
工作电压	working voltage	v	380
装盒速度	Packing speed	盒/min	160~200
纸盒纸质	Carton paper	g/m ²	300-350
纸盒尺寸	Carton size	mm	(70-180) × (45-90) × (18-60)
说明书规格	Specifications	长*宽	(70-320)x(70-210)
说明书纸质	Manual paper	g/m ²	50-60
耗气量	Air consumption	L/min	5~8
压缩空气	compressed air	Mpa	0.4-0.6
总重量	Total weight	kg	3500
外形尺寸	Dimensions	mm	4200 × 1600 × 2000
噪声	Noise	dB	≤75

条包生产线

Strip and parcel production line



- 条包生产线：条包多列机+多列整理机+装盒机，适用于粉剂、颗粒、液体、膏体等产品条包包装要求。
- 条包多列机：原装进口，稳定、高效。
- 多列整理机：可根据用户要求定制，适应多规格整理。
- GDZ-130B装盒机：全伺服驱动，稳定、高效。
- 稳定生产速度400-600条/分钟

- Strip packaging production line: multi row packing machine + multi column finishing machine + cartoning machine, which is suitable for packaging powder, granule, liquid, paste and other products.
- Multi row machine: imported, stable and efficient.
- Multi column finishing machine: can be customized according to user requirements, adapt to multi specification finishing.
- Gdz-130b cartoner: full servo drive, stable and efficient.
- Stable production speed 400-600 pieces / min



技术参数 Technical Parameter

名称	Name	单位Company	数值或说明Value or description
条包线总功率	Total power of each envelope	kw	10
工作电压	working voltage	v	380
整线生产速度	Production speed of the whole line	条/min	400-600
条包包材	Packing material	----	AL+PE, OPP+PE, NY+PE, 其他可热封包装纸
纸盒纸质	Carton paper	g/m ²	300-350
纸盒尺寸	Carton size	mm	(70-180) × (45-90) × (18-60)
说明书规格	Specifications	长*宽	(70-320) × (70-210)
说明书纸质	Manual paper	g/m ²	50-60
耗气量	Air consumption	L/min	5-8
压缩空气	compressed air	Mpa	0.4-0.6
总重量	Total weight	kg	3500
外形尺寸	Dimensions	mm	4300 × 1600 × 2000
噪声	Noise	dB	≤75



GDZ-130B

自动装盒机

Automatic Cartoner



上海新原德机械制造有限公司
电话: 021-57320018



GDZ-130B型自动装盒机是经典的低速装盒机，适用于各类产品大规格产品装盒要求。

- ◎结构先进，维护简便。
- ◎无主轴传动，噪音低。
- ◎伺服控制进料系统。
- ◎全伺服驱动。
- ◎选配GUK高速折纸机。
- ◎选配活动护板，防物料掉落。
- ◎稳定生产速度40-70盒/分钟。

GDZ-130B Automatic cartoning machine is a classic low-speed cartoning machine, which is suitable for all kinds of large-scale products.

- ◎Advanced structure and easy maintenance.
- ◎No spindle drive, low noise.
- ◎Servo control feeding system.
- ◎Full servo drive.
- ◎The Guk high-speed origami machine is selected.
- ◎Choose movable guard board to prevent material falling.
- ◎Stable production speed of 40-70 boxes / min.

技术参数 Technical Parameter

名称	Name	单位Unit	数值或说明Value or description
装盒机总功率	Total power of Cartoner	kw	5
工作电压	working voltage	v	380
装盒速度	Packing speed	盒/min	40~70
纸盒纸质	Carton paper	g/m ²	300-450
纸盒尺寸	Carton size	mm	(70-240) × (45-210) × (18-90)
说明书规格	Specifications	长*宽	(70-320) * (70-210)
说明书纸质	Manual paper	g/m ²	50-65
耗气量	Air consumption	L/min	5~8
压缩空气	compressed air	Mpa	0.4-0.6
总重量	Total weight	kg	2000
外形尺寸	Dimensions	mm	3300 × 1650 × 1800
噪声	Noise	dB	≤75

韩国YOUNG TECH

液体类多列机

Liquid multi train machine

规格

适用于：液体。

能力：15~60X线/1分钟

管装容量：1g~30g

包装线数：5~12线

包装材料：热材料

包装规格：W10~70, L80~200(可选)

电功率：10KW, 220/380V, 50/60HZ

尺寸：1,800 (W) × 3,500(L) × 3,200(H)

SPECIFICATION

application:liquid

capacity:15~60X lines/1min


filling capacity:1g~30g

packing lines:5~12lines

packing size:W10~70,L80~200(option)

electric power:10KW,220/380V,50/60HZ

dimension:1,800(W) × 3,500(L) × 3,200(H)

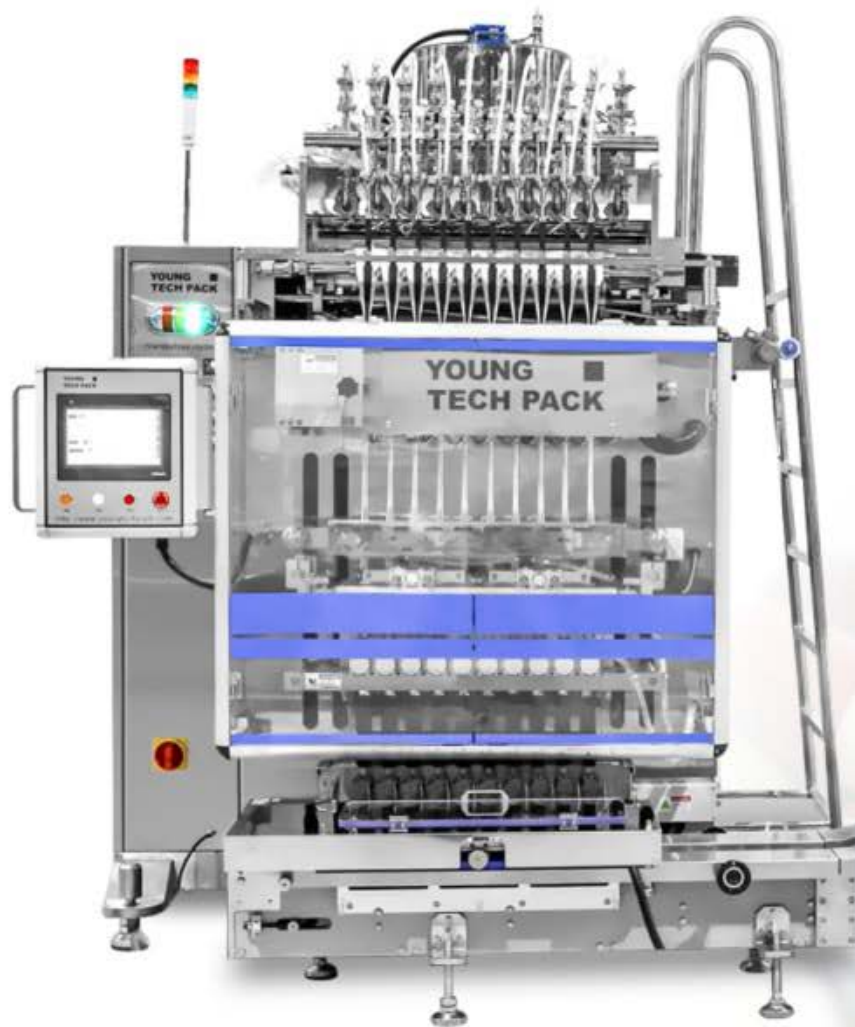

上海新源德机械制造有限公司

电话：021-57320013

韩国YOUNG TECH

粉剂类多列机

Powder multi row machine



顧德包裝
GOOD PACKAGING

规格

适用于：粉粒状物料。

能力：15~60X线/1分钟

管装容量：1g~30g

包装线数：5~12线

包装材料：热材料

包装规格：W10~70, L80~200(可选)

电功率：10KW, 220/380V, 50/60HZ

尺寸：1,800 (W) × 3,500(L) × 3, 200(H)

SPECIFICATION

application: powder granulated

capacity: 15~60X lines/1min

filling capacity: 1g~30g

packing lines: 5~12lines

packing size: W10~70, L80~200(option)

electric power: 10KW, 220/380V, 50/60HZ


dimension: 1,800(W) × 3,500(L) × 3,200(H)



GDZ-180

连续式自动装盒机

Successive Automatic
Boxing Machines

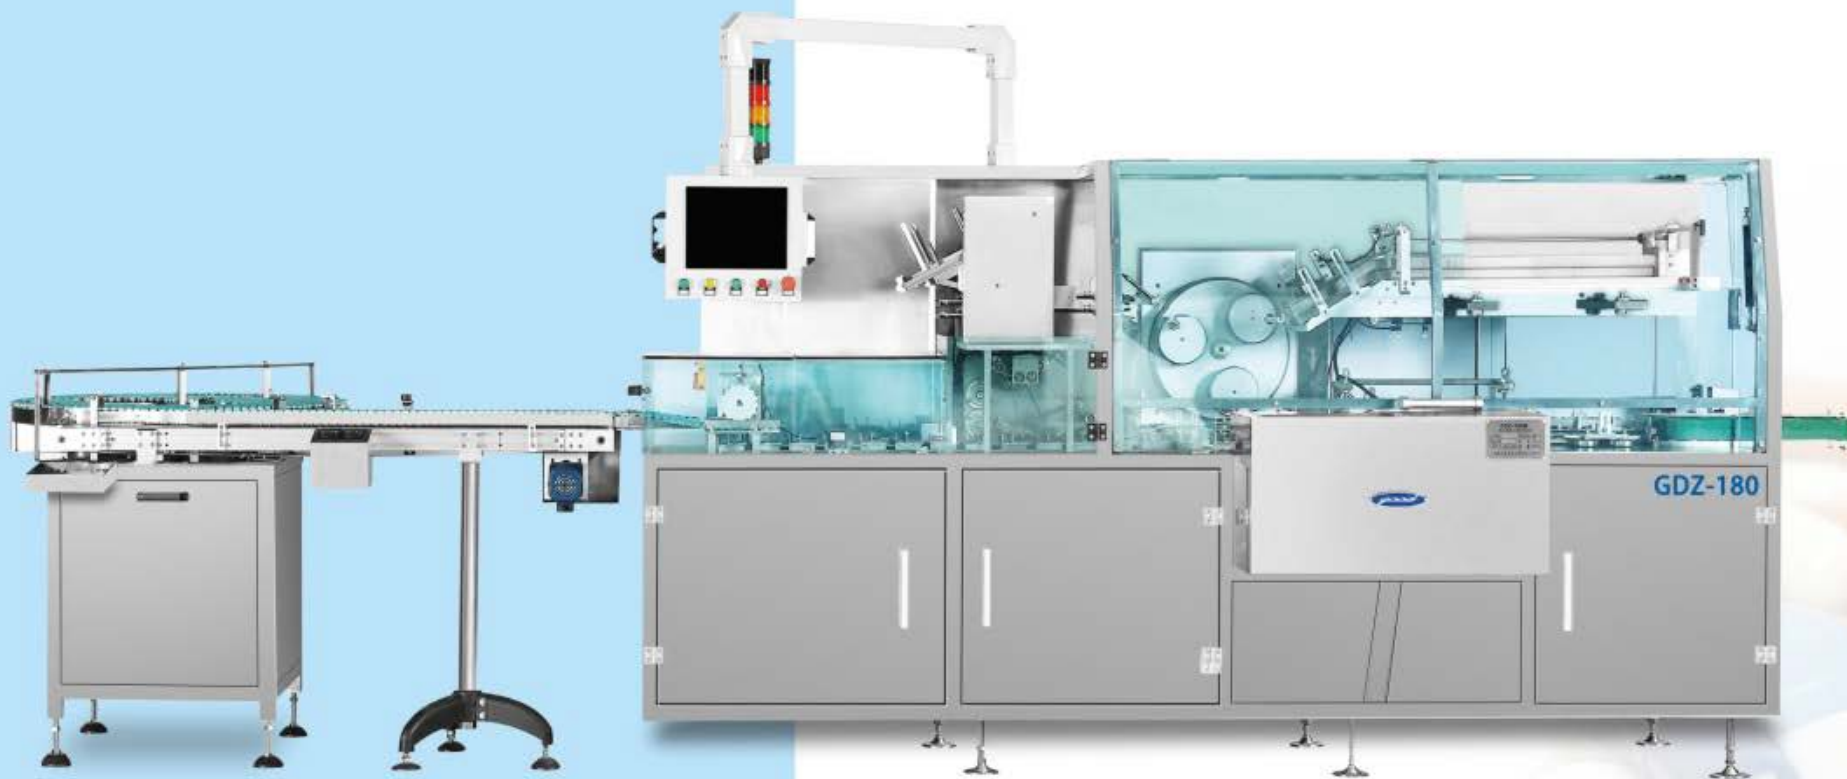



该机为公司2008年开始设计开发，2009年经陈卫东博士改良完成，2010年投放市场。该机型占地面积小，操作、调试、维修简便、稳定性强等特点。采用维修与操作分开，无任何卫生死角，更符合GMP的要求。

GDZ-180型自动装盒机是经典的中速装盒机，适用于各类产品中中速装盒要求。

- 结构简洁，占地小，维护简便。
- 配备视觉系统检测产品完整性。
- 伺服控制进料系统。
- 高性能折纸机，防双张设计。
- 选配GUK高速折纸机。
- 稳定生产速度120-160盒/分钟。

The design of the company was improved in 2008 and was put into the market by Chen Dong in 2009. It has the advantages of small floor area, easy operation, debugging, maintenance and strong stability. The maintenance and operation are separated, and there is no sanitary dead corner, which is more in line with GMP requirements.

GDZ-180 Automatic cartoning machine is a classic medium speed cartoning machine, which is suitable for medium speed cartoning requirements of various products.

- Simple structure, small occupation and easy maintenance.
- Equipped with visual system to detect product integrity.
- Servo control feed system.
- High performance origami, double sheet design.
- Guk high speed origami machine is selected.
- Stable production speed 120-160 boxes / min.

技术参数 Technical Parameter

名称	Name	单位Company	数值或说明Value or description
装盒机总功率	Total power of Cartoner	kw	3
工作电压	working voltage	v	380
装盒速度	Packing speed	盒/min	120 ~ 160
纸盒纸质	Carton paper	g/m ²	250-350
纸盒尺寸	Carton size	mm	(70-180) × (45-70) × (18-60)
说明书规格	Specifications	长*宽	(70-320) * (70-210)
说明书纸质	Manual paper	g/m ²	50-60
耗气量	Air consumption	L/min	5 ~ 8
压缩空气	compressed air	Mpa	0.4-0.6
总重量	Total weight	kg	2000
外形尺寸	Dimensions	mm	3300 × 1200 × 1800
噪声	Noise	dB	≤75

邮箱: xxsgood@163.com
http://www.new-good.com

GDZ-130

间隙式装盒机

ordinary intermittent
cartoning machine

该机型为公司2002年开发，在GDZ-80型的基础上进行改良。具有占地面积小、性价比高、适应多规格操作等优势。

The equipment was research and development in 2002, it's improved based on GDZ-80 type. virtue: occupied small area high cost performance adapt many kinds of operation specification defect: maintenance and debugging are complex.

GDZ-130型自动装盒机是经典的低速装盒机，适用于各类产品低速装盒及特殊规格定制装盒要求。

- 结构紧凑、占地面积小。
- 凸轮传动，是通过两次热处理，氮化、渗盐渗碳表面耐磨耐高温，使用寿命十年不变形，终身保修。
- 选配视觉系统检测产品完整性。
- 选配伺服控制进料系统。
- 高性能折纸机，防双张设计。
- 选配GUK高速折纸机。
- 适合多规格及非标产品的使用。
- 稳定生产速度60-100盒/分钟。





GDZ-130 Automatic cartoning machine is a classic low-speed cartoning machine, which is suitable for low-speed cartoning of various products and customized cartoning requirements of special specifications.

◎Compact structure and small floor area.

◎The cam drive, through two heat treatment, oxynitriding, salt carburizing, wear-resistant surface, high temperature resistance, service life of 10 years, no deformation, lifetime warranty.

◎Optional vision system to detect product integrity.

◎Servo control feeding system is selected.

◎High performance origami, double sheet proof design.

◎The Guk high-speed origami machine is selected.

◎Suitable for multi specification and non-standard products.

◎Stable production speed of 60-100 boxes / min.

技术参数Technical Parameter

型号model	GDZ-130型 (特殊型)	GDZ-150型
生产能力 production capacity	60-100盒/分钟	80-120盒/分钟
盒子尺寸 box dimensions	(45-180) × (15-100) × (15-55)mm (150-210) × (45-130) × (15-80) mm(加大行程)	(45-180) × (15-55) × (15-55) mm (150-210) × (45-130) × (15-55) mm(加大行程)
说明书尺寸 dimensions of operating instructions leaflet	(70-200) × (70-140) 加大行程(100-300) × (100-200)	(70-200) × (70-140) 加大行程(100-300) × (100-200)
功率 power	50HZ-380V-0.75KW	50HZ-380V-0.75KW
耗气量 air consumption	6-10L/min	6-10L/min
真空吸力 (自带真空泵) vacuum suction force(with asupplied vacuum pump)	0.6Mpa	0.6Mpa
重量 weight	1500kg	3500kg
外型尺寸 dimensions	1300 × 1150 × 1650mm(不含连线)	1500 × 1000 × 1850mm(不含连线)
纸盒要求 requirements upon paper box	250g-350g/m ²	250g-350g/m ²
说明书要求 requirements upon operating instructions leaflet	50g-65g/m ²	50g-65g/m ²
噪声 noise	≤75dB	≤75dB
主要功能 main function	手工加料、自动进书、装盒可配套连线	手工加板、自动进书、装盒可配套连线
特点 characteristic	采用先进是PLC人机界面控制, 具有缺盒、缺书、缺料报警、剔除等功能	采用先进是PLC人机界面控制, 具有缺盒、缺书、缺料报警、剔除等功能

SDZ-400

型三维包装机

3D packaging machine





设备在包材方面能在PVC和BOPP两种材料间随意选择，其中PVC材料由于其本质特点不容易吸附静电，让设备更加稳定运行，且价格相对较低，能节省包装成本。

设备体积小，速度快，可同装盒机联接。上膜位置高度为30厘米，一个人即可上料作业。且设备稳定速度可大于20包每分钟。

设备传动以机械传动为主，零部件使用寿命长，设计使用均为5-10年，相对备品备件价格便宜，维护费用低，无需库存易损件。

In terms of packaging materials, the equipment can be randomly selected between PVC and BOPP materials. PVC materials are not easy to absorb static electricity due to its essential characteristics, which makes the equipment more stable operation, and the price is relatively low, which can save the packaging cost.

The equipment is small in size and fast in speed, and can be connected with the cartoning machine. The height of film placement is 30cm, and one person can load materials. The stable speed of the equipment can be more than 30 packets per minute.

Mechanical transmission is the main drive of the equipment. The service life of the parts is long, and the designed service life is 3-10 years. Compared with the spare parts, the price is cheap, the maintenance cost is low, and there is no need to stock vulnerable parts.

技术参数 Technical Parameter

名称	Name	单位Company	数值或说明Value or description
生产能力	throughput	包/分钟	20-30
包装尺寸	Package size	mm	长*宽*高(50-300)*(40-150)*(30-90)
总功率	Total power	KW	4.5
工作电压	working voltage	V/Hz	380/50
工作气压	Working pressure	Mpa	0.4-0.6
重量	weight	kg	600
噪音	noise	dB	≤60
外形尺寸	Dimensions	mm	1600*850*1660

邮箱: xxsgood@163.com
http://www.new-good.com

FC-160/200/260

型重量检测机

type weight test machine



该机型为我公司2009年与德国HBM公司进行合作研发，属国内组装。特点：采用先进的32位高速度处理芯片，全数字信号处理和传输，具有大容量产品存储和异常记录，全部称重传感器采用德国HBM传感器，可气流式机械选制装置。

Under the research and development of HBM from Germany and our company, machine of this model was assembled domestically in 2009, it enjoys feature such as 32 bit high speed chip, digital signal processing and transmission, large volume and abnormality recording. And all of it's sensors of weighing come from HBM Germany.



特点

- 1.加强型不锈钢机架；全面防水设计。
- 2.采用高精度传感器；基于先进高速的数字信号处理技术。
- 3.动态重量自动补偿技术；零点自动分析和跟踪技术。
- 4.100个产品默认；简便的产品编辑和存储。
- 5.快递产品切换和自动调整相对应产品的分选速度。
- 6.2000条记录，有日志报表数据打印功能。
- 7.基于触摸屏的友好操作接口。

Characteristic


1. Reinforced stainless steel frame; full waterproof design.
2. Adopt high precision sensor; based on advanced high-speed digital signal processing technology.
3. Dynamic weight automatic compensation technology; zero point automatic analysis and tracking technology.
4. 100 products by default; easy product editing and storage.
5. Switching of express products and automatic adjustment of sorting speed of corresponding products.
- 6.2000 records, with log report data printing function.
7. Friendly operation interface based on touch screen.

技术参数 Technical Parameter

名称	Name	单位Company	数值或说明Value or description
生产能力	throughput	个/分钟	60-100/120-150/200-350
称重探头	Weighing probe	--	德国HBM高精度传感器
传感器材质	Sensor material	--	铝或不锈钢
称重范围	Weighing range	g	3-200
最高检测精度	Maximum detection accuracy	g	±0.3
最小刻度	Minimum scale	g	0.1
皮带输送速度	Belt conveying speed	米/分	20-80 (可变频调速)
输送方向	Conveying direction	--	面向屏幕从左向右
剔除方式	Elimination method	--	摆杆/推杆/气吹剔除
总功率	Total power	KW	0.2
工作电压	working voltage	V/Hz	220/50
工作气压	Working pressure	Mpa	0.4-0.6
重量	weight	kg	100
噪音	noise	dB	≤60
外形尺寸	Dimensions	mm	1200*650*1400 ± 50

KDZ-350/400

型自动捆包机
automatic machine

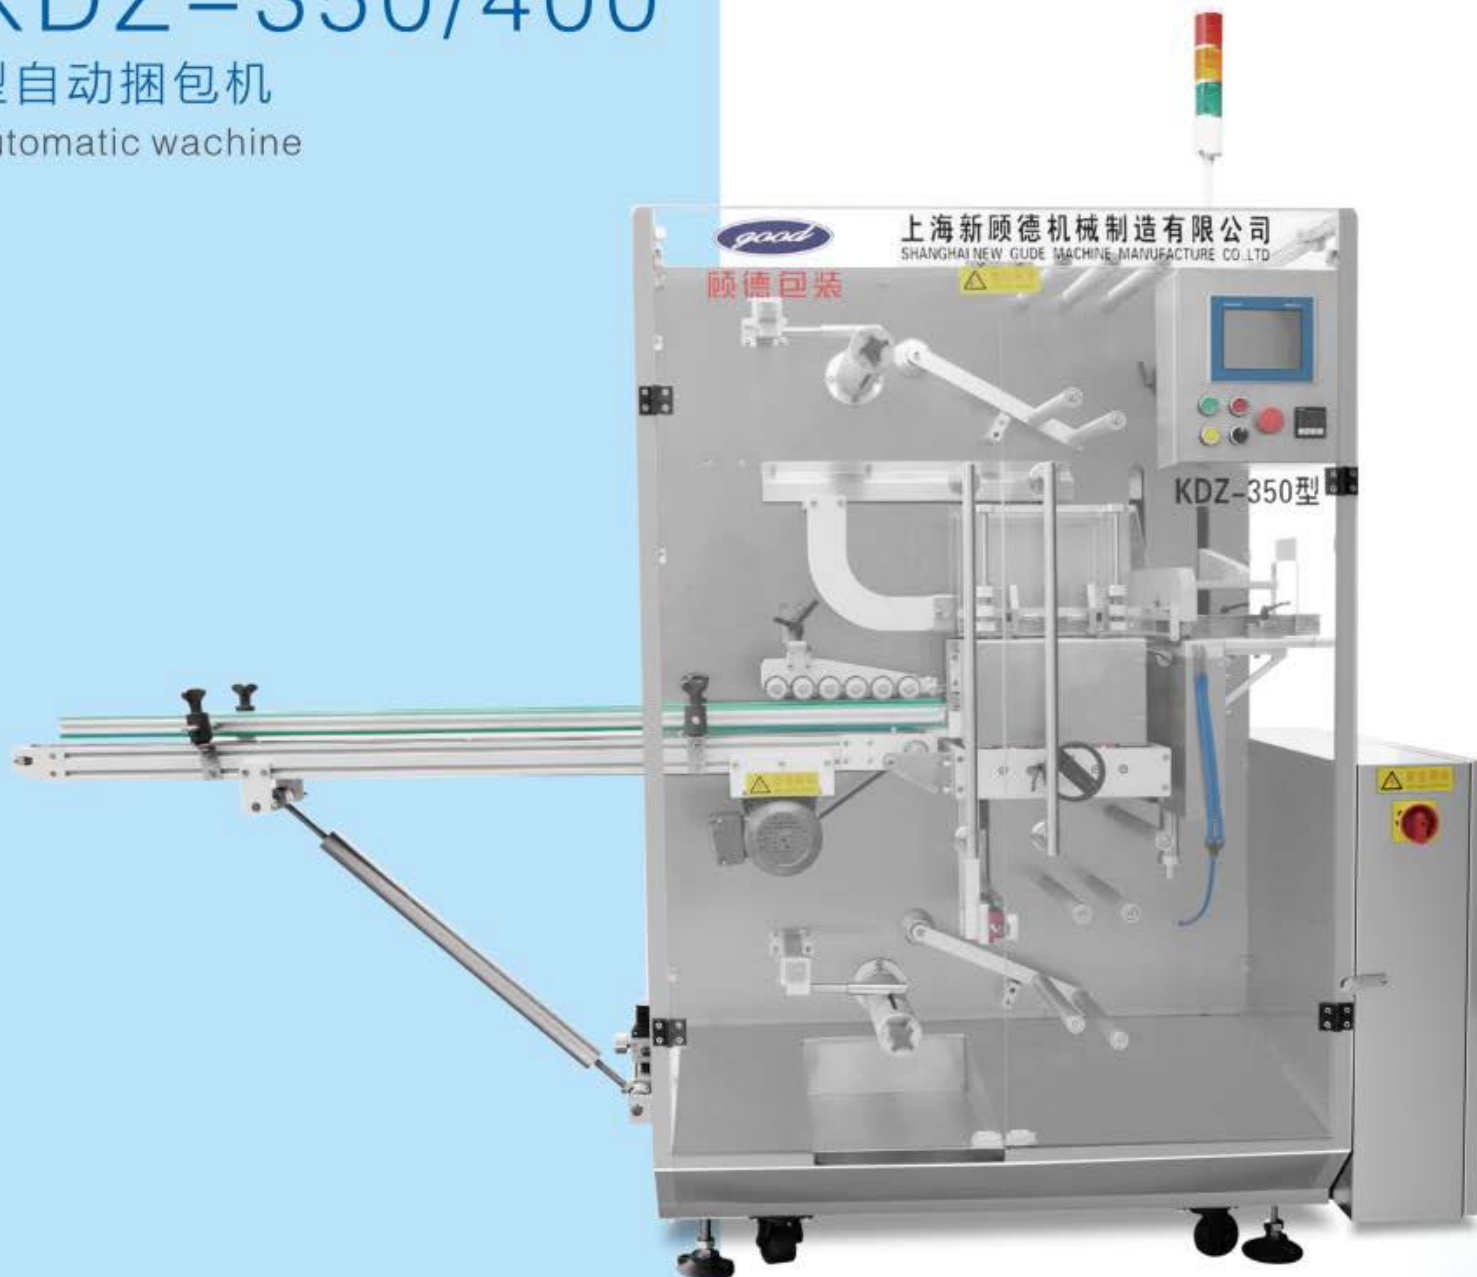

上海新顾德机械制造有限公司
电话: 021-57320013



该机型为公司2009年10月开发研制，2010年五月完成的新
型产品，是目前国内产品的先进代表。采用操作面与维修面完
生分离。无任何卫生死角；采用欧洲标准设计，是同类产品的
先进机型。

the requirement was research and development in the second
half of 2009,adopt maintenance and poertaion of separate that have
no hesath comer,meet the requirement of GMP europe
standard,and the advanced type of the same product in the
international.

技术参数Technical Parameter

型号model	KDZ-350/400型自动捆包机
生产能力 production capacity	20-35包/分钟
盒子尺寸 box dimensions	L180-200mm W65-300mm H12-100mm
功率 power	2.5KW
真空吸力(自带真空泵) vacuum suction force(with asupplied vacuum pump)	0.6Mpa
重量 weight	700kg
外型尺寸 dimensions	(L)2200 × (W)1050 × (H)1850mm
主要功能 main function	塑料带能紧贴于被捆扎包件表面，保证包件在运输，贮存中不会捆扎不牢 而散落，同事捆扎整齐美观。
特点 character istic	采用操作与维护分开实际原理，采用PLC控制与私服驱动控制具有： 稳定性强，设计简约，维护方便，占地面积小，易操作等优势。

FDZ-600

型装箱一体机

automatic machine




FDZ-600型自动装箱一体机是集开箱、装箱、封箱于一体的集成机型，适用于各类产品装箱要求。

- ◎功能全：开箱、装箱、封箱、加隔板、投卡等。
- ◎结构先进，操作、维护简便。
- ◎占地面积小。
- ◎欧洲标准设计。
- ◎选配scara机器人装箱。
- ◎稳定生产速度：2-10箱/分钟。

FDZ-600 Automatic packing machine is an integrated machine which integrates unpacking, packing and sealing. It is suitable for all kinds of product packing requirements.

- ⊙ Full function: unpacking, packing, sealing, adding clapboard, card, etc.
- ⊙ Advanced structure, easy operation and maintenance.
- ⊙ It covers a small area.
- ⊙ European standard design.
- ⊙ SCARA robot is selected for packing.
- ⊙ Stable production speed; 2-10 cases / min.

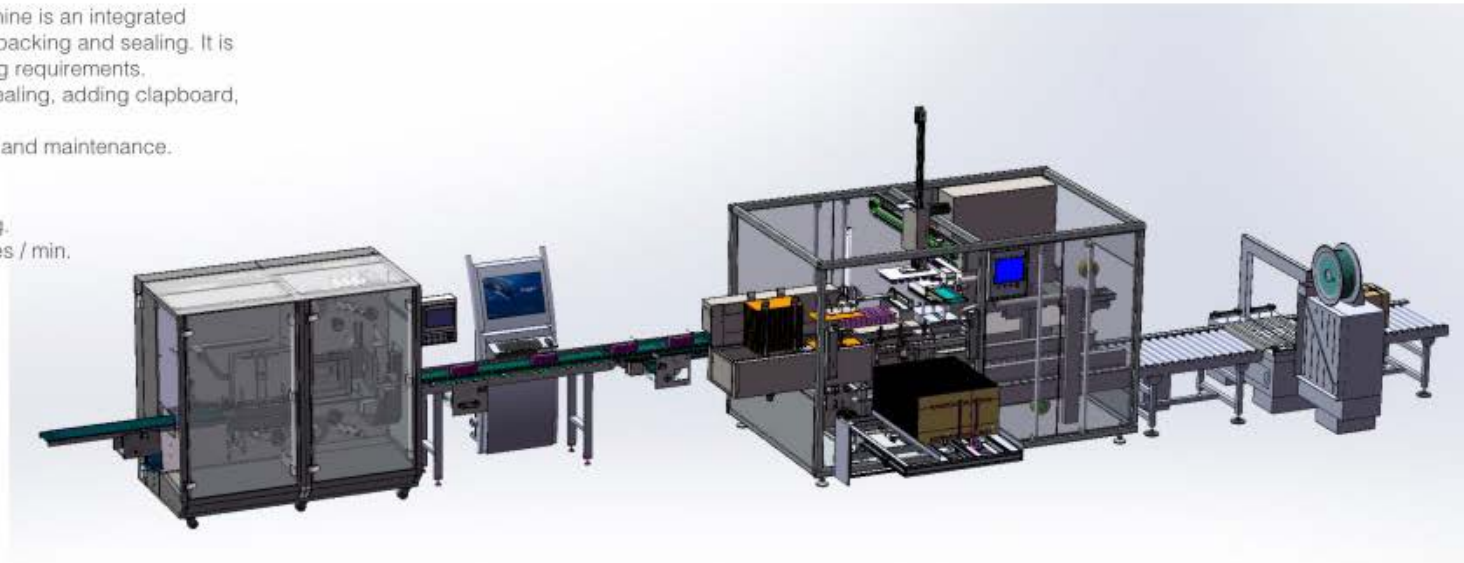

技术参数 Technical Parameter


名称	Name	单位Company	数值或说明Value or description
装箱机总功率	Total power of packing machine	kw	3
工作电压	working voltage	v	380
装箱速度	Packing speed	箱/min	2-10
纸箱尺寸	Carton Size	mm	(360-540) × (225-345) × (200-400)
进口高度	Inlet height	mm	840-900
出口高度	Exit height	mm	555-615
耗气量	Air consumption	L/min	5-8
压缩空气	compressed air	Mpa	0.4-0.6
总重量	Total weight	kg	2000
外形尺寸	Dimensions	mm	2800 × 1800 × 2500
噪声	Noise	dB	≤70

机器人装箱、码垛系统

automatic machine

机器人盒装箱码垛主要适用装盒机后道整理、盒装箱、箱码垛功能，机器人的操作非常简单，可全天候作业，抓手可根据产品的特性定制，机器人有3-6轴可选，负载30-45Kg可选，运行半径0.5-3.5m 可选。

The robot box palletizing is mainly applicable to cartoning machines for finishing, packing and stacking. The operation of the robot is very simple and can work all day long. The gripper can be customized according to the characteristics of the product. The robot has 3-6 axes, 30-45kg load and 0.5-3.5m running radius.

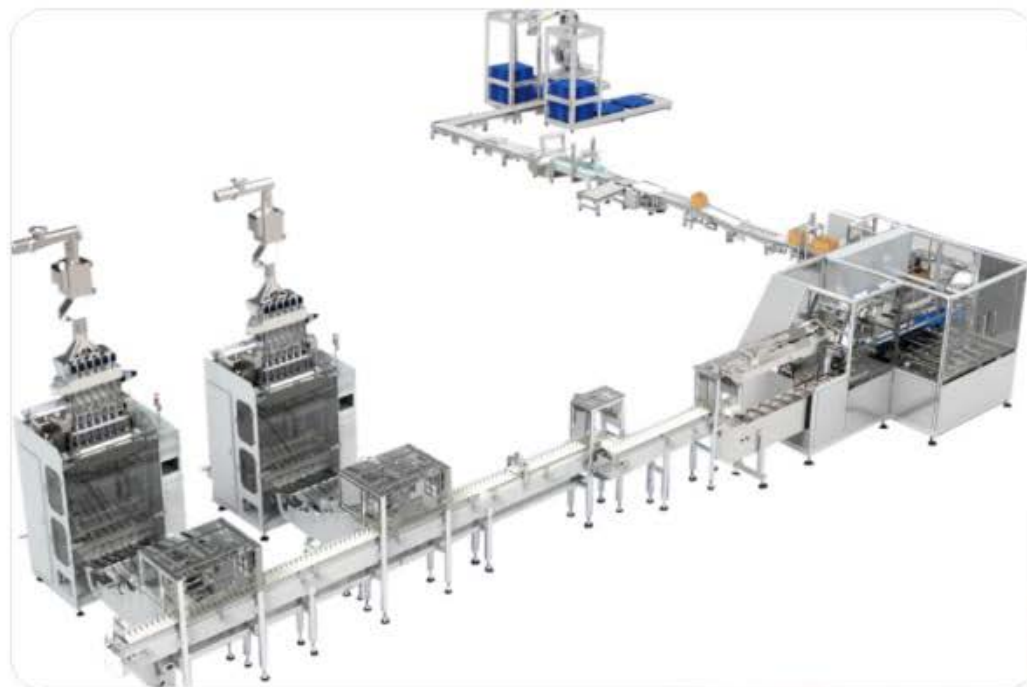

上海新源德机械制造有限公司
电话: 021-57320013



顧德包裝
GOOD PACKAGING



25/26

邮箱: xxsgood@163.com
<http://www.new-good.com>

NEWGOOD

SHANGHAI

上海新顾德机械制造有限公司

SHANGHAI XINGUDE MACHINERY MANUFACTURING CO., LTD

地址：上海市金山区亭卫公路3308号

电话：021-57320013 54756808

邮箱：xxsgood@163.com

网址：<http://www.new-good.com>

Add: No. 3308, Tingwei Road, Jinshan District, Shanghai

Tel: 021-57320013 54756808

E-mail: xxsgood@163.com

Website: <http://www.new-good.com>



© 顾德包装 (GUDE PACING) 版权所有

采用生态纸印刷 Adopt ecological paper to print

品牌推广 | 金卓策划 | 18005875567